


????????????? ??????

+48 58 55 40 410

Standards:

ISO 15973

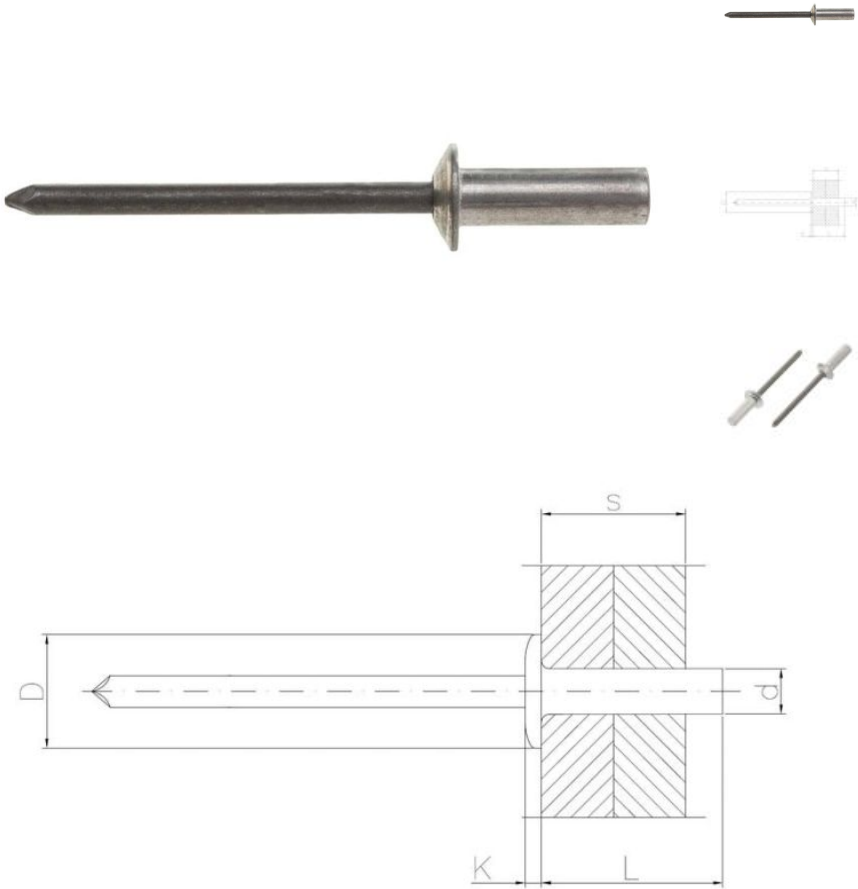

???????

| Material index | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] |
|----------------|--------|--------|--------|-----------|--------|
| 2407048250AST  | 4.8    | 25     | 9.5    | 16.0-20.0 | 1.5    |
| 2407048210AST  | 4.8    | 21     | 9.5    | 13.0-16.0 | 1.5    |
| 2407048160AST  | 4.8    | 16     | 9.5    | 9.5-11.0  | 1.5    |
| 2407048145AST  | 4.8    | 14.5   | 9.5    | 8.0-9.5   | 1.5    |
| 2407048130AST  | 4.8    | 13     | 9.5    | 6.5-8.0   | 1.5    |
| 2407048125AST  | 4.8    | 12.5   | 9.5    | 6.0-8.0   | 1.5    |
| 2407048110AST  | 4.8    | 11     | 9.5    | 5.0-6.5   | 1.5    |
| 2407048095AST  | 4.8    | 9.5    | 9.5    | 3.5-5.0   | 1.5    |
| 2407048085AST  | 4.8    | 8.5    | 9.5    | 0.5-3.5   | 1.5    |
| 2407040125AST  | 4.0    | 12.5   | 8.0    | 6.5-8.0   | 1.3    |
| 2407040110AST  | 4.0    | 11     | 8.0    | 5.0-6.5   | 1.3    |
| 2407040095AST  | 4.0    | 9.5    | 8.0    | 3.5-5.0   | 1.3    |
| 2407040080AST  | 4.0    | 8      | 8.0    | 0.5-3.5   | 1.3    |
| 2407032125AST  | 3.2    | 12.5   | 6.0    | 6.5-8.0   | 0.9    |
| 2407032095AST  | 3.2    | 9.5    | 6.0    | 3.5-5.0   | 0.9    |
| 2407032080AST  | 3.2    | 8      | 6.0    | 2.0-3.5   | 0.9    |